


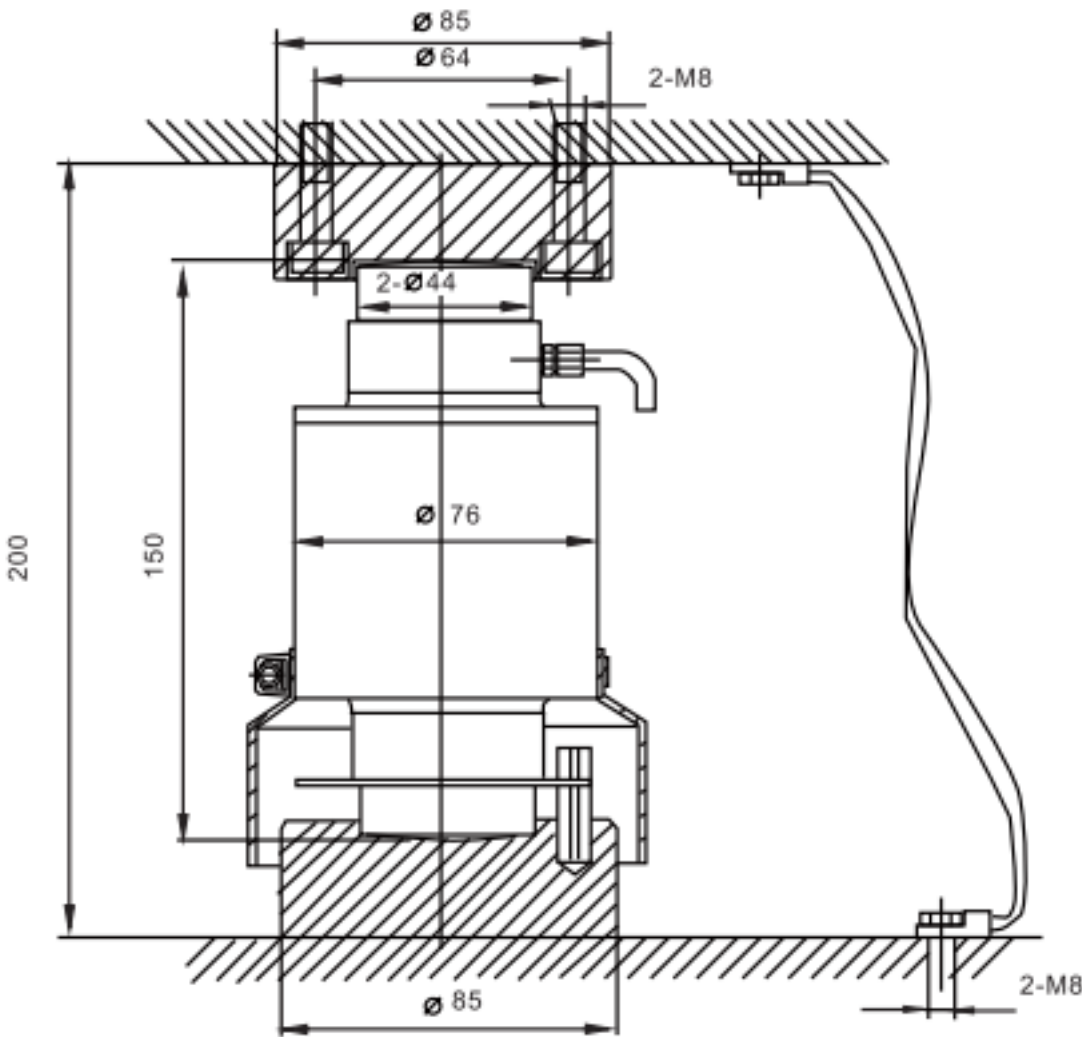

汽车衡、轨道衡、轴重秤、地上秤
Truck scale,railway scale, axle-load scale,floor scale

TECHNICAL PARAMETER| 4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

数字模块分辨数 A/D Module Resolutin	60000码	工作温度范围 Temperature range, operating	-30~+70℃
额定载荷 Rated capacities(Emax)	20,25,30,40,50t	安全过载 Maximum safe overload	±0.02%F.S/10℃
额定输出 Rated output	20000,25000,30000,40000,50000内码	极限过载 Ultimate overload	150%F.S
数据刷新速率 Digital Refurbishing Freqency	50 Hz	推荐激励电压 Excitation,recommend	IP68
通讯波特率 Communication BPS	9600BPS	最大激励电压 Excitation,maximum	9~12V DC
精度等级 Accuracy class	C3	防封等级 Protection class	20V DC
		材质 Construction	1200m
温度系数 Tempperature Effect	±0.02%F.S	电缆 Cable	Length:12m(20t),15m(25t),16m(30~50t)
温度补偿范围 Temperature range, compensated	-10℃~+40℃		Diameter: φ 5mm